



# MASTERLINE® Maskinutbud

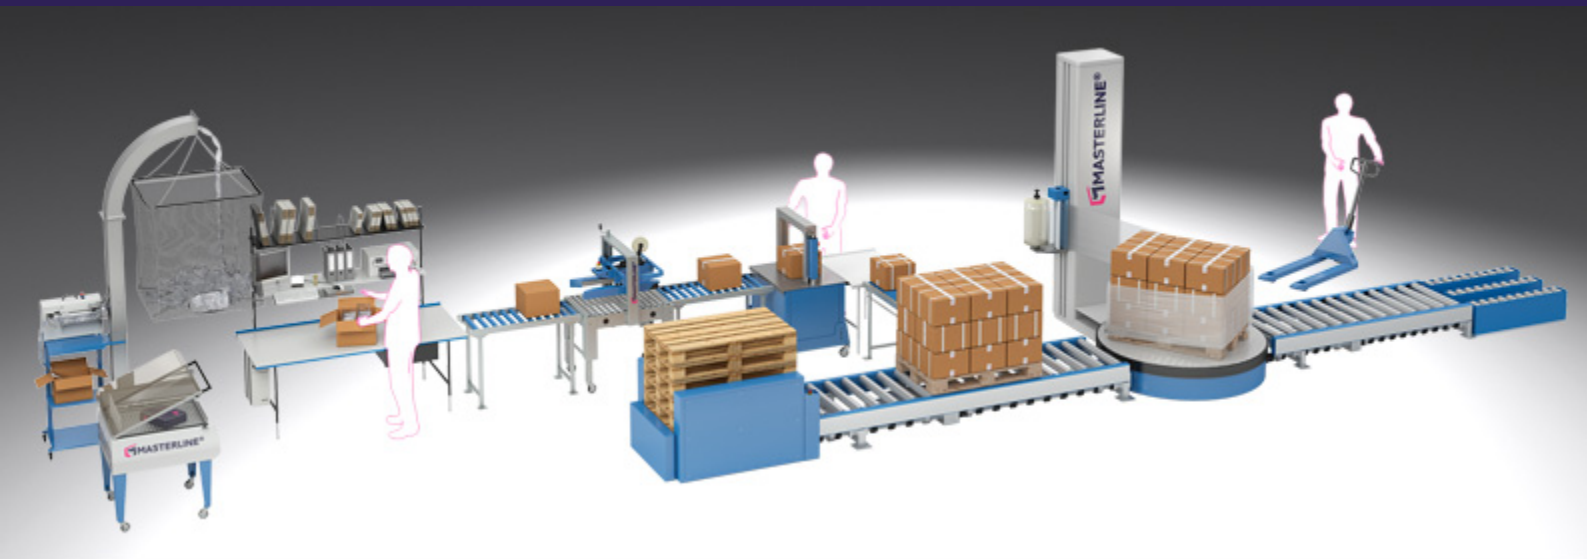

antalis   
Just ask Antalis

## MASTERLINE® 480 Bandningsverktyg

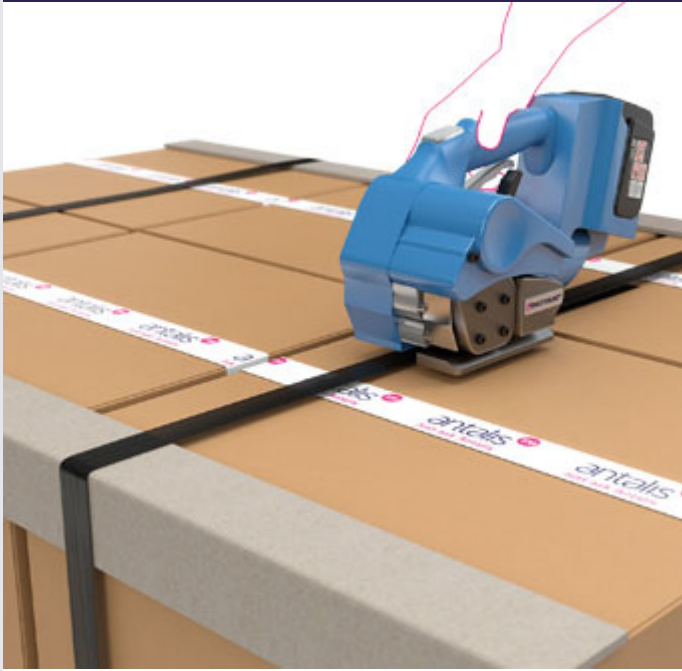

### Fördelar:

- + Enkel iläggning av bandet
- + Inställbar bandspänning
- + Allt med ett grepp - spänna, svetsa, försluta
- + Enkel hantering tack vare ergonomisk form
- + Inställning av svetstiden med en knapptryckning
- + Batteriernas laddningsnivå visas kontinuerligt

### Användningsområden:

- Säkring av pallar och last
- Trä- och byggvaror
- Bygg-, tegel-, betong- och stenplattor
- Metallprodukter, stål-/aluminiumprofiler, etc.

Masterline 480   480P	
Vikt	3,8 kg   4,15 kg
Elanslutning	Batteri
Bandtyp	PP och PET   PET
Bandbredd	10-16 mm   16 - 19 mm
Bandtjocklek	PP 0.5-1.0 mm PET 0.5-1.0 mm   PET 1.0 - 1.3 mm
Spännkraft	2300 N/230 kg   4500 N
Laddningstid	ca. 20 min.
Bandningar per atteriladdning	Upp till 240 bandningar / batteri

## MASTERLINE® 490 Hand strapping device



### Advantages

- + Easy handling due to ergonomic shape of the device
- + 4x adjustable function: Automatic, Semi automatic, Manual and Soft
- + Multifunctional start button
- + Digital display (tension, welding time, Battery charging level)
- + Light and fast device
- + Easy to operate
- + Second battery included
- + Short battery charging time
- + Quick battery change

### Application areas

- Wood and sawn products
- Building materials, bricks, concrete blocks and composite stones
- Metal products, steel/aluminium profiles, laminations, etc.
- Pallets and tie-downs

Masterline 490	
Weight	3.7 kg (incl. Battery)
Dimensions	330mm x 105mm x 165mm
Strap tightness	2750 N/275kg
Soft Strap	500N/50kg
Max. speed	About 15m/min.
Battery	Makita Lithium battery 14.4 V, 3.0 Ah
Charging time	About 20 minutes
Noise emission	86,8 dB
Material	PP / PET
Strap thickness	PET: 0.5 – 1.1 mm, PP: 0.5 – 1.1 mm
Strap width	10-16 mm

## MASTERLINE® 410T

### Bordsbandare



#### Fördelar:

- + Enkelt rullbyte
- + Steglöst inställbar bandspänning
- + Flyttbar = flexibel användning
- + Mycket tyst förslutningshuvud
- + Enkel installation och hantering
- + Stor bandrulle i bordet

#### Användningsområden:

- Förslutning av transportförpackningar
- Bandning av kartonger
- Buntning

Masterline 410T	
Vikt	76 kg
Elanslutning	120 V, 220 V, 230V, enfas AC-ström, 50/60 Hz
Mått Maskin	B: 850 mm, D: 560 mm, H: 780-950 mm
Bandtyp	PP
Bandmått	5-13 mm
Bandspänning	8-45 kg/80-450N
Bullerniva	65 dB

## MASTERLINE® 410AP

### Strapping machine



#### Advantages

- + fully automatic strap adjustment
- + simple reel swap and simple threading system
- + adjustable strap tensioning
- + mobile, i.e. flexible applications
- + positively controlled strap operation
- + simple installation and operation
- + high performance, high efficiency
- + low maintenance and spare parts costs
- + soft strapping of individual or very soft packages

#### Application areas

- Sealing of shipping packages
- Strapping of cardboard boxes
- Baling

Masterline 410AP	
Weight	180 kg
Electrical connection	230 V
Working height	800 – 905 mm
Machine dimensions	L: 990 mm, W: 610 mm, H: 1370 - 1475 mm
Strap type	PP
Strap width	5, 8 and 12 mm
Strap thickness	5 x 0,47 mm or 8 x 0,45 mm or 12 x 0,55 mm (optional)
Frame size	600 x 500 mm
Speed	max. 55 straps per minute
Output	0,5 KW
Sealing procedure	heat-seal

## MASTERLINE® 410AS Strapping machine



### Advantages

- + Simple, safe, user-friendly operating
- + Easy to maintain with low maintenance and spare parts costs
- + Simple installation, plug and play
- + Standard with free rollers in table plate
- + Standard with a big arch
- + Automatic strap infeed
- + Mechanical outside tension control

### Application areas

- Sealing of shipping packages
- Strapping of cardboard boxes
- Baling

Masterline 410AS	
Weight	220 kg
Electrical connection	230 V
Working height	810 mm
Machine dimensions	L: 1430 mm, W: 620 mm, H: 1540 mm
Strap type	PP
Strap width	8 and 12 mm
Strap thickness	8 and 12 mm x 0,55 - 0,75 mm (optional)
Frame size	850 x 600 mm
Speed	max. 27 straps per minute
Sealing procedure	heat-seal

## MASTERLINE® 320 Box closing machine



### Advantages:

- + Simple, safe, user-friendly operating
- + Easy to adjust for different case sizes
- + Easy tape and dispenser replacement
- + Easy to maintain with low maintenance and spare parts costs
- + Can be used in a mobile and flexible way
- + Adjustable tape tension, pressure, knife

### Application areas:

- Automatic closing of boxes on the top and bottom with tape
- Suitable for use in various industries such as logistics, retails, wholesalers, food industry such as in baking and butchery, contract packers

Masterline 320	
Weight	230 kg
Power supply	AC230 V 50/60Hz, 1ph, 400W
Case dimensions (for Fefco 201 and 200)	L 150 - unlimited mm, W 100 - 480 mm, H 120 - 480 mm
Machine dimensions (LxWxH)	1096 x 890 x 1480 mm
Working height	608 - 818 mm
Material	PVC or PP tape
Max. width of tape	50 mm (optional 75 mm)
Tape overlap	40 - 55 mm

## MASTERLINE® 710S/710P Sträckfilmsmaskin



### Fördelar:

- + Höjdvakning med fotocell
- + Inställbar hastighet för vridbord och folievagn
- + Inställbar inlindning upptill och nedtill
- + 3 program: Enkel, korsvis och regntågig sträckfilmning
- + Mekanisk folievagn
- + Max. sträckning upp till 250 % (endast 710P, version 710S har mekanisk broms (utan försträkningsfunktion))

### Användningsområden:

- Säkring av pallar och last
- Skydd mot fukt och smuts, stölskydd

Masterline 710S / 710P	
Vikt	750 kg
Elanslutning	230V 1 fas~N/ 50hz 1,39 kW
Mått L x Bx H	2 400 mm x 1 650 mm x 2 500 mm
Pall, max.	1 200 mm x 1 000 mm
Nyttolast, max.	2 000 kg
Diam. vridbord	1 650 mm
Vridbordets höjd	80 mm

## MASTERLINE® 650R Krympmaskin med huv



### Fördelar:

- + Används helst för miljövänliga polyolefin-folier
- + Flyttbar = flexibel användning
- + 10 olika program
- + Säkerhetsfunktion på fogningsarmen
- + Elektronisk display
- + Hög hastighet

### Användningsområden:

- Skyddande folie för produkter
- Svetsning och krympning i ett moment
- Används i tidnings-, tryckeriverksamhet och livsmedelsindustri

Masterline 650R	
Vikt	75 kg
Elanslutning	220 V, 230 V 1 fas, 3,15 kW
Mått (stängd)	1 260 x 810 x 1 165 mm
Mått (öppen)	1 260 x 810 x 1 310 mm
Arbetshöjd	920 mm
Förslutningsarm	540 x 390 mm
Maxkapacitet	0-300 st. per timme

## MASTERLINE® 610P Inplastningsmaskin



### Fördelar:

- + Folieomslag ersätter användning av pappersomslag, vilket ger kostnadsbesparingar genom lägre materialförbrukning
- + Folien skyddar mot fukt
- + Bättre reklameffekt med transparent plastfolie Mycket effektiv för stora mängder (upp till 1 200 st./ timme)
- + Enkel hantering och installation (plug and play)

### Användningsområden:

- Inplastning av tidningar, tidskrifter, bruksanvisningar osv.
- Särskilt lämpad för pappershandel, tryckerier, copy shops

#### Masterline 610P

Vikt	130/167 kg
Elanslutning	220-240V
Maskinens mått	610 x 830 x 1 055 mm
Produktlängd	100 - 360 mm
Produktbredd	160 - 250 mm
Max. produkthöjd	20 mm
Folietjocklek	25-30 µm
Foliebredd	450-550 mm
Kapacitet	max. 0.6 Kw

Packaging means to take responsibility for products and processes Antalis Packaging assume this responsibility every day and give you security.



### Packaging material

No matter which packaging material you need, we can supply them from Europe our standard range or specially tailored to the dimensions of your product. We can help you to select the best One of our more than 100 sales people will help you to select the best solution. Increasing the efficiency of your processes and safety of your products is our goal.



### Packaging machines

Only the combination of the right packaging material with a modern and technically innovative packaging technology to make your packing process effectively and economically. Our department for packaging machinery will be pleased to help you: [maschinen@antalis-verpackungen.de](mailto:maschinen@antalis-verpackungen.de)



### Packaging solutions

Tailored ideas especially for your application? Then you should contact our department for packaging development (Packaging Design Center). Using advanced CAD Software our packaging engineers design your individual packaging solution while using a variety of packaging materials.



### Packaging services

Beside our wide range of products we can offer you a various packaging services. Take the advantages of our consulting and service range and invest in the optimization of your packaging processes and also in the quality of your products.